NTX micron MICRON USER GUIDE

Features

- Weatherproof Sealed Case
- Ultra-Long Range™ (NTX Compatible)
- Digital Circuitry
- See-Saw Effect Elimination Feature
- Audible & Visual Backdrop Indication
- Low Battery Drain
- Anti Theft Alarm (NTX Receiver Compatible)
- Easy Micron Registration (NTX Receiver Compatible)
- CNC Machined Rollerwheel - Tru-Run™

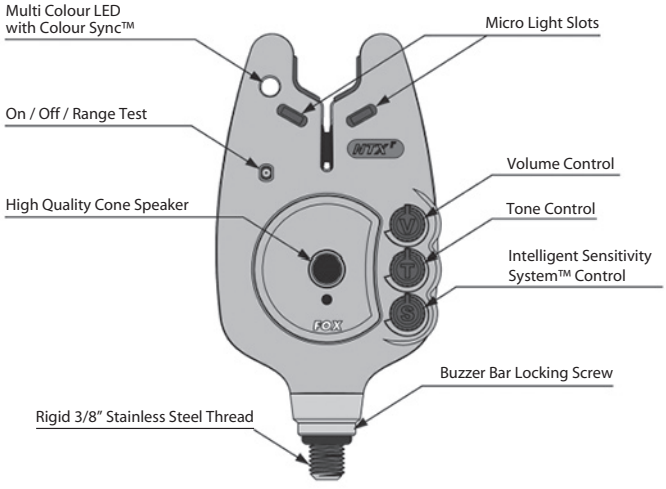
Multi Colour LED with Colour Sync™
Micro Light Slots
On / Off / Range Test
Volume Control
High Quality Cone Speaker
Tone Control
Intelligent Sensitivity System™ Control
Buzzer Bar Locking Screw
Rigid 3/8" Stainless Steel Thread

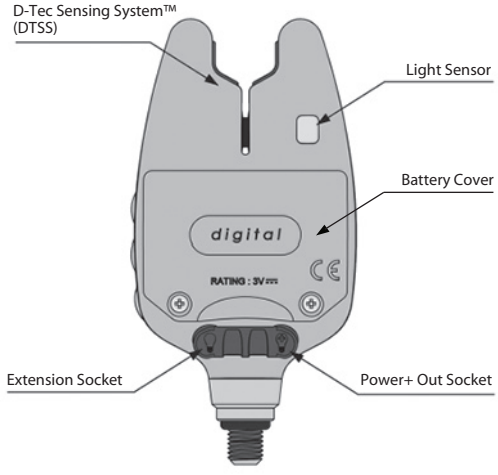

Fitting the Batteries

1. Turn off unit prior to fitting or replacing batteries.

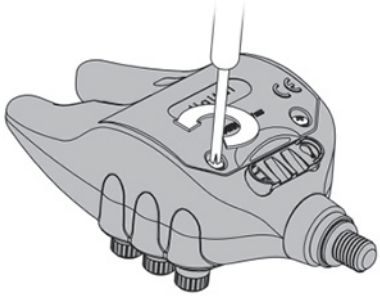

2. Using the supplied screwdriver unscrew the two battery cover screws.

3. Pull the lower tab up to remove the battery cover.

4. Take care removing the batteries. Insert new batteries and ensure correct polarity.

5. For best weatherproofing, ensure battery cover has a good seal by firmly pushing the edging of the battery cover.

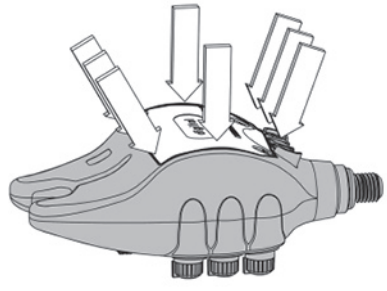

6. Re-fit cover and screws.

DO NOT over tighten the battery compartment screws, excessive force will damage the screw threads.

Battery Requirements

The Microns require **2 x LR6 AA 1.5V Alkaline batteries.** The use of good quality batteries is essential for maximum battery life. To reduce the risk of battery leakage:

- **DO NOT** mix old and new batteries
- **DO NOT** mix different battery types
- The use of rechargeable batteries is **NOT** recommended

Switching On / Off

- Push down and release the power switch to activate the unit.
- Push up and release the power switch to deactivate the unit. (LED will briefly flash red)

Please note:
The unit does not beep when switched on or off.

The NTX-R comes with a hard case cover, this features a small tab which automatically switches the unit off, and ensures it won't re-activate during transit.



Multi Colour LED with Colour Sync™

This allows the choice of five colours (Red, Blue, Green, Cyan & White) to be selected with the push of a button.

1. Simply remove the battery cover and screws.

2. Using a pen or LED selector tool press the selector plunger positioned between the batteries to select the LED colour.

Your choice will remain stored in the Microns memory even when the batteries have been removed. The NTX-R automatically synchronizes the colour selection with the NTX Receiver.



Buzzer Bar Locking Screw

This allows infinite alignment adjustability for the Micron facing position. If the Micron is not facing the desired position, unscrew the micron until you can reach the locking screw. Back the locking screw a quarter to half a turn, then screw the Micron back on.

Controls

Volume Control
Turn the knob clockwise to increase volume, anti-clockwise to lower volume.
There are eight different volume settings available.

Tone Control
Turn the knob clockwise to raise pitch, anti-clockwise to lower pitch.
There are eight different tone settings available.

Intelligent Sensitivity Control (With See-Saw Elimination)
Turn the knob clockwise to increase the sensitivity and anti-clockwise to reduce the sesitivity.
There are eight different sensitivity settings available. In all sensitivity settings (except maximum), the line must travel the specified distance in the same direction in order to trigger the unit. Any movement in the opposite direction will reset the distance counter to zero. This can substantially reduce, or eliminate false triggering caused by wind and water movement. The unit automatically defaults to maximum sensitivity, once the sensitivity "threshold" has been reached - i.e. once the rollerwheel is moving.



Sensitivity Table
Setting 1 = 68mm (Min)
Setting 2 = 60mm
Setting 3 = 51mm
Setting 4 = 43mm
Setting 5 = 34mm
Setting 6 = 26mm
Setting 7 = 17mm
Setting 8 = 8.5mm (Max)

Sockets

Power Out Socket
Allows Fox Illuminated Bite Indicators to be powered directly from the Micron. The Illuminated Bite Indicator will then light up when the Micron is activated and latch for approximately 20 seconds.

Power+ Out Socket
New 3.5mm power out socket designed for use with Fox next generation swingers and hangers with Colour Sync™.

Range Test

To activate the range test feature, press and hold down the ON switch. The unit will then start to transmit a sequence of four beeps, at medium pitch, repeating at intervals of approximately one second. The user can then walk away, with the receiver, to their desired location. If the test signal can still be heard from the receiver, then it is within reception range. NOTE: The unit itself will remain silent whilst in test mode – beeps are heard from the receiver only, but the LED on the unit will illuminate. If using more than one bite alarm, select range test mode on ONE unit only. If more than one unit is placed in test mode, then the test signals will either be received intermittently, or not received at all. If all the bite alarms in use have good batteries, then it is safe to assume that they will each have similar transmission range. The test signal will continue until one of the following occurs:

A) Test mode auto-cancels. This will occur approximately five minutes after selecting test mode.

B) The unit is triggered by line movement. If this occurs, then the unit will revert to normal mode.

C) The user switches the unit off. This also cancels test mode and the unit will re-start in normal mode when switched back on.

Sensitivity control setting also applies in test mode the same amount of line movement is required to bring the unit out of test mode, as would normally berequired to make it "beep" in normal mode. Once the unit has exited test mode, it reverts fully to normal operation, unless test mode is initiated again by the user.

Auto Nite Light

The NTX-R Micron is fitted with a light sensor. When it gets dark the LED automatically switches on a dimmer version of the colour it is set to.

To disable the Night Light - Push and hold the LED selector button at the same time as switching the Micron on. Repeat this proceedure to enable the Auto Night Light.

You will hear an audio tone to indicate the change. If the Micron is used under icy conditions or subjected to mud and dirt the Auto Night Light may get blocked, wipe the surface of the sensor lens if this occurs.

Drying Out After Use in Heavy Rain

These Microns have been designed to be weatherproof. However, after use in heavy rain, it is important to allow the unit to dry out properly by bringing the unit indoors and removing the hard case cover.

NEVER place batteries in a hot environment (e.g. on a radiator).

Compatibility (Ultra-Long Range™)

The NTX-R Micron contains an advanced transmitter device, capable of long distances, this is only compatible with the Fox NTX Receiver. Up to four NTX-R Micron's can be used at one time with the NTX Receiver. Please visit our website or consult the NTX Receiver manual for further information.

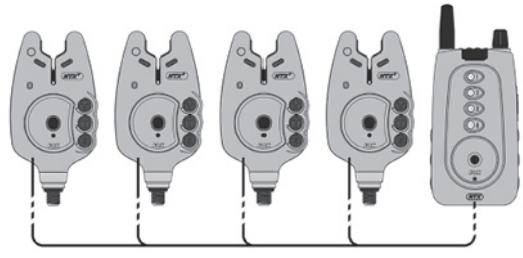

WORKS EXCLUSIVELY WITH THE NTX RECEIVER
NOT COMPATIBLE WITH EXISTING FOX RECEIVERS OR EXTENSION BOXES

Low Battery Warning

When the Micron detects that its batteries are failing, the main LED colour changes to purple. When this occurs, batteries should be replaced at the earliest opportunity, although the unit may continue to work for some time in this condition, particularly if the volume setting is reduced. No audible indication of low battery is given. It is not possible to change the LED colour once it has changed to purple.

Warnings

- Do not trigger LED or speaker in close proximity to human or animal eyes and ears.
- Store this equipment out of reach of children and infants.
- Avoid dropping or subjecting the Micron to severe impacts.
- Use only recommended batteries and accessories.

Warranty & Product Registration

Register your Fox product online at www.foxint.com. You will be given a Customer Reference Number and a Warranty Reference Number, please make a note of these numbers. You can view warranty details online using the Customer Reference number.

Alternatively fill out the Warranty Card enclosed in the box and post to:

Customer Care Department
Fox International Group Ltd, UK Headquarters,
56-58 Fowler Road, Hainault Business Park,
Hainault, Essex, IG6 3UT

Micron is a Registered Trade Mark
NTX-R, NX, N & NTX Receiver are Registered Trade Marks
We reserve the right to alter or modify the contents of this manual.